

## Flat-Panel LED Lighting

### 2x2 LED Troffers

T22B3310DU35

T22B3310DU40

T22B3310DU50

### 2x4 LED Troffers

T24B3310DU35

T24B3315DU40

T24B3315DU50

### 1x4 LED Troffers

T14B3310DU35

T14B3315DU40

T14B3315DU50



Dimmable



TAA  
Compliant



UL-Listed



Sealed  
Fixture



Eco-  
Friendly




5 Year  
Warranty


## Specifications

	T22B3310DU35	T22B3310DU40	T22B3310DU50	T24B3310DU35	T24B3315DU40	T24B3315DU50	T14B3310DU35	T14B3315DU50	T14B3310DU50
Input Voltage	120 - 277 V~	120 - 277 V~	120 - 277 V~	120 - 277 V~	120 - 277 V~	120 - 277 V~	120 - 277 V~	100 - 277 V~	100-277 V~
Input Current	0.35 A	0.35 A	0.35 A	0.48 A	0.48 A	0.48 A	0.35 A	0.35 A	0.35 A
Input Frequency	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50 / 60 Hz	50/60 Hz	50/60 Hz
Watts	34 W	34 W	34 W	54 W	54 W	54 W	34 W	34 W	34 W
Luminous Flux	3520 lm	3570 lm	3610 lm	5670 lm	5730 lm	5780 lm	3560 lm	3610 lm	3650 lm
Luminous Efficacy	103.5 lm/W	105 lm/W	106.2 lm/W	105 lm/W	106.1 lm/W	107 lm/W	104.7 lm/W	106.2 lm/W	107.4 lm/W
Dimmable	0V - 10 V	0V - 10 V	0V - 10 V	0V - 10 V	0V - 10 V	0V - 10 V	0V - 10 V	0V - 10V	0V - 10V
Color Temperature	3500 k	4000 k	5000 k	3500 k	4000 k	5000 k	3500 k	4000 k	5000 k
Color Rendering Index	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra	85 (†) Ra
Weight	8.6 lbs.	8.6 lbs.	8.6 lbs.	16.3 lbs.	16.3 lbs.	16.3 lbs.	8.42 lbs.	8.42 lbs	8.42 lbs
Length	23.6 in.	23.6 in.	23.6 in.	47.8 in.	47.8 in.	47.8 in.	47.8 in.	47.8 in.	47.8 in
Width	23.6 in.	23.6 in.	23.6 in.	23.6 in.	23.6 in.	23.6 in.	11.8 in.	11.8 in.	11.8 in
Depth	3.9 in.	3.9 in.	3.9 in.	3.2 in.	3.2 in.	3.2 in.	3.2 in.	3.2 in.	3.2 in .
Operating Temperature	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F	15 to 104 <sup>0</sup> F
Storage Temperature	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F	-4 to 140 <sup>0</sup> F
Warranty	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year	Limited 5-Year
RoHS	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant	Compliant
Lifetime	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70	100,000 Hr. @ L70
Standards	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80	UL/FCC/DLC/LM80

2x2 LED Troffs

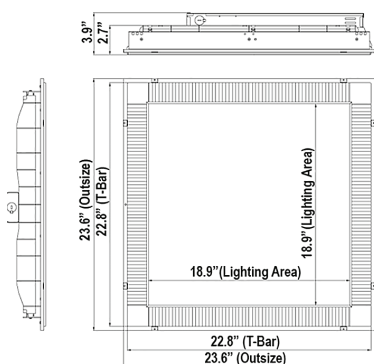

2x4 LED Troffs

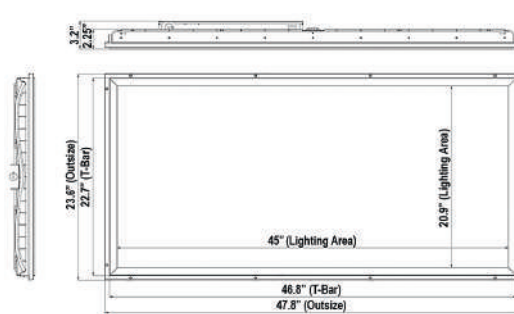

1x4 LED Troffs

